

# ATEM 2 M/E Broadcast Panel



The incredible ATEM 2 M/E Broadcast Panel has the power for the most complex live broadcast events and it's perfect when you have the space for a large panel and need all the control at your fingertips. The ATEM 2 M/E Broadcast Panel features an amazing design that not only looks incredible, but perfectly positions all controls just where you need them for the ultimate creativity on complex multi layer live production. The ATEM 2 M/E Broadcast Panel connects via ethernet and includes loop thru for your media management computer.

**\$14,995**


## Connections

### Ethernet

2 x 10/100/1000 BaseT with loop output for additional control panels or computers.

### Software Updates

1 x USB for firmware updates.

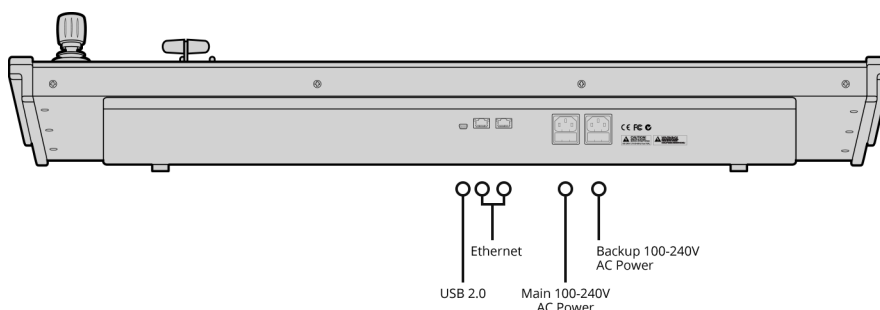

## Product Specifics

### Direct Cross Points

20

### DSK Transition Selectors

Auto, Cut, Tie/Preview.

### Multi Control Buttons

6

### Shifted Cross Points

40

### Preview Transition

2

### Destination Bus

2

### Crosspoint Button Type

Tri-Color LED.

### Transition Rate Displays

2

### Source Select Bus

2

### Crosspoint Label

High Contrast RGB Bitmap.

### LED Menu Display

2

### Fader Bar

2

---

**Next Transition Selectors**  
BKG, Key 1 - Key 2 (per M/E).

**Menu Control**  
24 x LCD Bitmap Buttons.

**3 Axis Joystick**  
1

---

**On-Air Indicator**  
8

**Dedicated Macro Buttons**  
10

**Numeric Keypad**  
1

---

**Power Status Indicators**  
4

---

## Software

**Software Applications**  
ATEM Software Control Panel.

---

## Operating Systems



Mac OS X 10.10 Yosemite,  
Mac OS X 10.11 El Capitan  
or later.



Windows 8.1 64-bit or  
Windows 10 64-bit.

Aerospace Certified Embedded OS.

Aerospace Certified Embedded OS.

---

## Power Requirements


**Power Supply**  
2 x Internal 110 - 240V AC.

**Redundant Power**  
Yes

**Power Usage**  
70W

---

## Physical Specifications

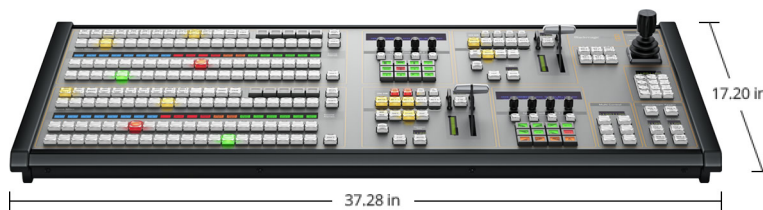

33.62 lb

---

## Environmental Specifications

**Operating Temperature**  
0° to 40° C (32° to 104° F)

**Storage Temperature**  
-20° to 60° C (-4° to 140° F)

**Relative Humidity**  
0% to 90% non-condensing

---

## What's Included

ATEM 2 M/E Broadcast Panel

---

---

## Warranty

### 12 Month Limited Manufacturer's Warranty

Warranty details can be found in the ATEM Switchers Operation Manual in the support page at [www.blackmagicdesign.com](http://www.blackmagicdesign.com)

---

All items on this website are copyright Blackmagic Design Pty. Ltd. 2017, all rights reserved.  
All trademarks are property of their respective owners. MSRP excludes sales taxes/duties and shipping costs.

Blackmagic Design Authorized Reseller