

## H.264 Pro Recorder



Encode to digital H.264 files in real time from professional SDI, HDMI, analog component, S-video and composite video equipment! Get the highest quality 4:2:2 video capture from all popular SD/HD video formats. Connect video cameras and VTRs, including HDCAM, Digital Betacam, Betacam SP, DVD players and much more. H.264 Pro Recorder includes Media Express software for Mac OS X and Windows, which lets you preview and set the video quality of encoded files.

**US\$495**

### Bağlantılar

**SDI Video Input**  
1 x 10-bit SD/HD switchable

**Analog Video Input**  
1 x Component YUV on 3 BNCs switchable to S-Video or Composite. Component supports HD and SD.

**HDMI Video Input**  
1 x HDMI type A connector.


**Analog Audio Input**  
2 Channels of professional balanced analog audio with standard 1/4 inch jack connections.

**SDI Audio Input**  
2 Channels from embedded SDI audio.

**HDMI Audio Input**  
2 Channels from embedded HDMI audio.

**External Control**  
RS-422 deck control.

**Computer Interface**  
USB 2.0 high speed (480Mb/s)

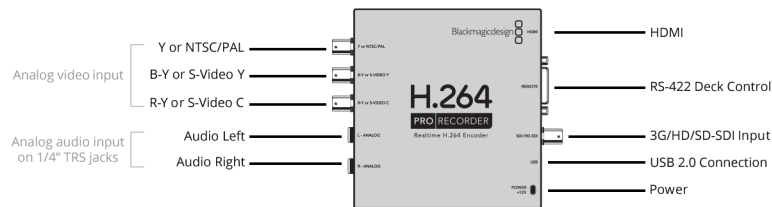

### Standartlar

**SD Video Formats**  
525i59.94 NTSC, 625i50 PAL

**Audio Sampling**  
Television standard sample rate of 48 kHz and 24 bit.

**Video Sampling**  
4:2:2 YUV

**HDMI Color Precision**  
10-bit

**SDI Rates**  
270 Mb, 1.5G-SDI, 3G-SDI

---

### HD Video Formats

720p50, 720p59.94, 720p60  
1080p23.98, 1080p24, 1080p25,  
1080p29.97, 1080p30, 1080p50,  
1080p59.94, 1080p60  
1080PsF23.98, 1080PsF24, 1080PsF25,  
1080PsF29.97, 1080PsF30  
1080i50, 1080i59.94, 1080i60

### SDI Compliance

SMPTE 259M and SMPTE 292.

### SDI Color Precision

10-bit

### Color Space

REC 601, REC 709

### Copy Protection

HDMI input is unable to capture from copy protected HDMI sources. Always confirm copyright ownership before capture or distribution of content.

---

## İşlemci

### Encoding

Hardware based real time H.264 encoder supports multiple profiles for small, portable video devices through to full resolution HDTV.

### Realtime Scaling

Capture at full HD or SD resolution, or use direct resize in realtime to scale and encode for the intended playback device, such as iPhone, iPad or iPod.

---

## Yazılım

### Software Included

Media Express, Blackmagic System Preferences and Blackmagic driver on Mac OS X™. Media Express, Blackmagic Control Panel and Blackmagic driver on Windows™.

### Internal Software Upgrade

Firmware upgrade via USB.

---

## İşletim Sistemleri



Mac OS X 10.10 Yosemite,  
Mac OS X 10.11 El Capitan  
ya da daha sonrası.



Windows 8.1 ya da  
Windows 10.

---

## Güç Gereksinimi

### Power Supply

+12V universal power supply included with international socket adaptors for all countries. Cable tie point.

---

## Fiziksel Spesifikasyonlar



---

## Fiziksel Kurulum

Requires computer with a USB 2.0 port.

---

## Çevresel Spesifikasyonları

**Operating temperature:**  
0° to 40° C (32° to 104° F)

**Storage temperature:**  
-20° to 45° C (-4° to 113° F)

**Relative Humidity:**  
0% to 90% non-condensing

---

## Kutu İçeriği

H.264 Pro Recorder

Software CD

+12V universal power supply with international socket adaptors

---

## Garanti

12 Month Limited Manufacturer's Warranty.

---

Bu sitede yayınlanan tüm içeriğin her hakkı Blackmagic Design Pty. Ltd'e aittir. 2017, Tüm Hakları Saklıdır.  
Tüm ticari markalar kendi ilgili sahiplerinin mülkiyetidir. Satış vergisi/harcı ve kargo masrafları MSRP'ye dahil değildir.

Blackmagic Design Authorized Reseller